



- Deliver full template size

- Resolution 75-150 dpi

- Only JPG (JPEG) format

- No bleed

- No pre-press marks

- Only CMYK colors

(Visible 52x170)

(in full 1:1 size)

(We only accept jpg format, full size layouts)

(Strict full size only) (crop marks, scales...)

(not RGB or Pantone)

CHECK before uploading: That layout measurements are correct to fit the system


That the colors are vivid enough to appear (over 30% CMYK)

That the resolution and picture quality are OK

NOTE:


TETRIX considers uploaded documents to fulfill requirements in accordance to these notes. No separate layout check is performed.



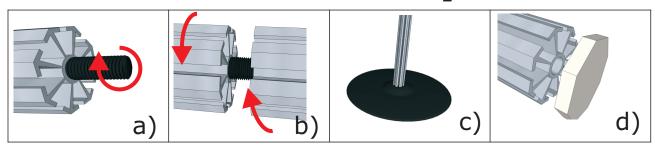

- a) Connect the octagonal rods two-by-two, using the supplied threaded joints.
- b) Make sure that the grooves in the rods are aligned-otherwise the beams cannot be connected properly. Should the grooves not align, simply loosen one of the rods half a turn and tighten the other rod.
- c) Attach the round foot with the M10 bolt.
- d) Attach the end caps


Insert the keder of the printed canvas into the grooves in the beams.





Attach the beams to the rods using the torx key.

- Put the end of the rail into the groove of the rod and lock in place by turning the screw 180 degrees clockwise. To open, turn counter clockwise.
- -Attach the brochure holders (optional)

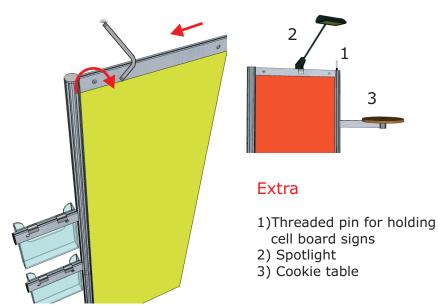



parts list

pares rise	Amoun	t Checked
octagonal rod 1000mm		
beam 520mm		
lock		
round foot		
end cap		
M10 bolt		
M10 threaded joint		
allen key		
torx key		
print		



optional items

				F	amouni	. Checke	u
	cookie t	ab	le				
	brochure	e h	nolder				
Date			Signature				
1 - 5.25							