


Cello

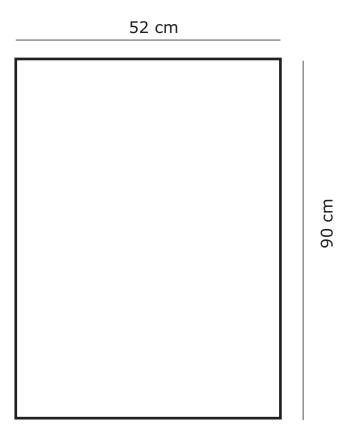

- Deliver full template size

- Resolution 75-150 dpi

- Only JPG (JPEG) format (We only accept jpg format, full size layouts)

(Visible 52x90)

(in full 1:1 size)

(Strict full size only)

- No bleed

- No pre-press marks

(crop marks, scales...) - Only CMYK colors (not RGB or Pantone)

CHECK before uploading:

That layout measurements are correct to fit the system


That the colors are vivid enough to appear (over 30% CMYK)

That the resolution and picture quality are OK


NOTE: TETRIX considers uploaded documents to fulfill requirements in accordance to these notes. No separate layout check is performed.



Cello

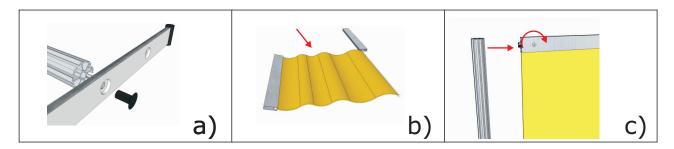

- a) Attach the feet to the octagonal rods through the middle hole with the M10 bolt.
- b) Insert the keders of the print into the grooves in the beams
- c) Fasten the beams to the rods using the supplied Torx key. Turn 180 degrees clockwise to fasten. To open, turn counter clockwise.
- a) Fasten the table top through the two counter sunk holes. The octagonal rods are threaded in both ends to accomodate M10 bolts.
- b) Washers are placed underneath the table top to avoid the wood becoming scratched when being used.

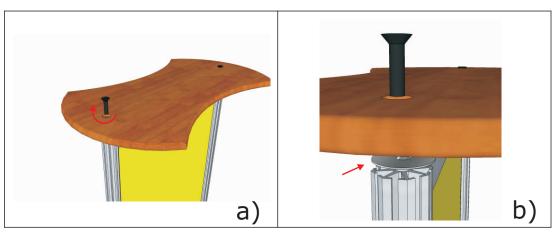



Extra

Cookie table



Cello parts list

Amount Checked octagonal rod 1000mm beam 520mm lock foot with endcaps M10 bolt Cello table top allen key torx key Print



Cello

optional items

		perorial reciris	 <u>Amount</u>	Checked
	Cookie t	able		
	brochure	e holder		
Date		Signature		