


- a) Connect the foot to the octagonal rod using the supplied bolt.
- b) Attach the end cap to the other end
- c) On the backside of the monitor you will find a back plate with 4 screw holes. Here you will fasten the L-shaped monitor holders using the supplied screwes. The holders should be fastened "upside down" as shown in the picture.
- Attach all 3 beams to the poles using the supplied Torx key. Turn clockwise to fasten, counterclockwise to open. Adjust the beams a) and b) so that the monitor holders rest on both beams. The height of the monitor can be adjusted by moving both beams up or down. The third beam c) can be fastened all the way down at the feet for maximum stability OR higher up to support brochure holders et.c.



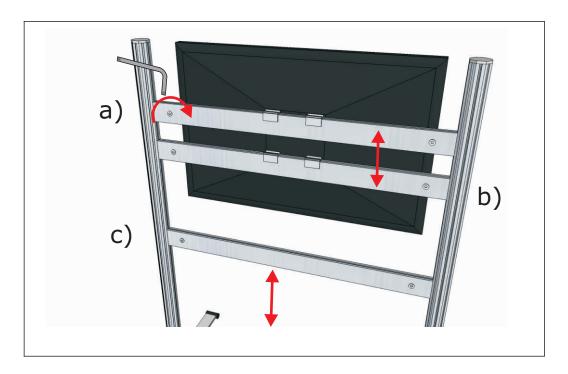

parts list

	pares rise	/	\mount	Checked
	octagonal rod 1000mm			
	beam 940mm			
	lock			
	end cap			
q	monitor holder			
	allen key			
	torx key			



optional items

				_	MINOUIN	ieckeu
	brochure	e r	nolder			
	cookie t	ab	le			
	slim foo	t				
	round fo	ot				
Date			Signature			
<u> </u>						